



Compex Ginger DVK Interfaces

WSB530 + WPS530MRH

2x 2.5Gigabit Ethernet (2.5GbE) LAN/WAN RJ45 Port

BT Module BLE4.1

LED24 LED23 LED22

LED5 LED6 LED20

LED21

DD2 (RGB)

4 Pin UART

PoE 802.3bt

2.4GHz U.FL Connector

CH1

CH2

M.2 (NGFF) E Key Socket with PCIe 3.0

Switch

Reset Switch

DC Jack 12V

M.2 (NGFF) B Key Socket with PCIe 3.0 or USB 3.0 (support 5G cellular module)

DD3 (RGB)

DD1 (RGB)

LED3

LED2

LED4

LED1


Front View



Compex Ginger DVK Interfaces

WSB530 + WPS530MRH

Switch for Force USB
ON: Normal mode
OFF: Force USB

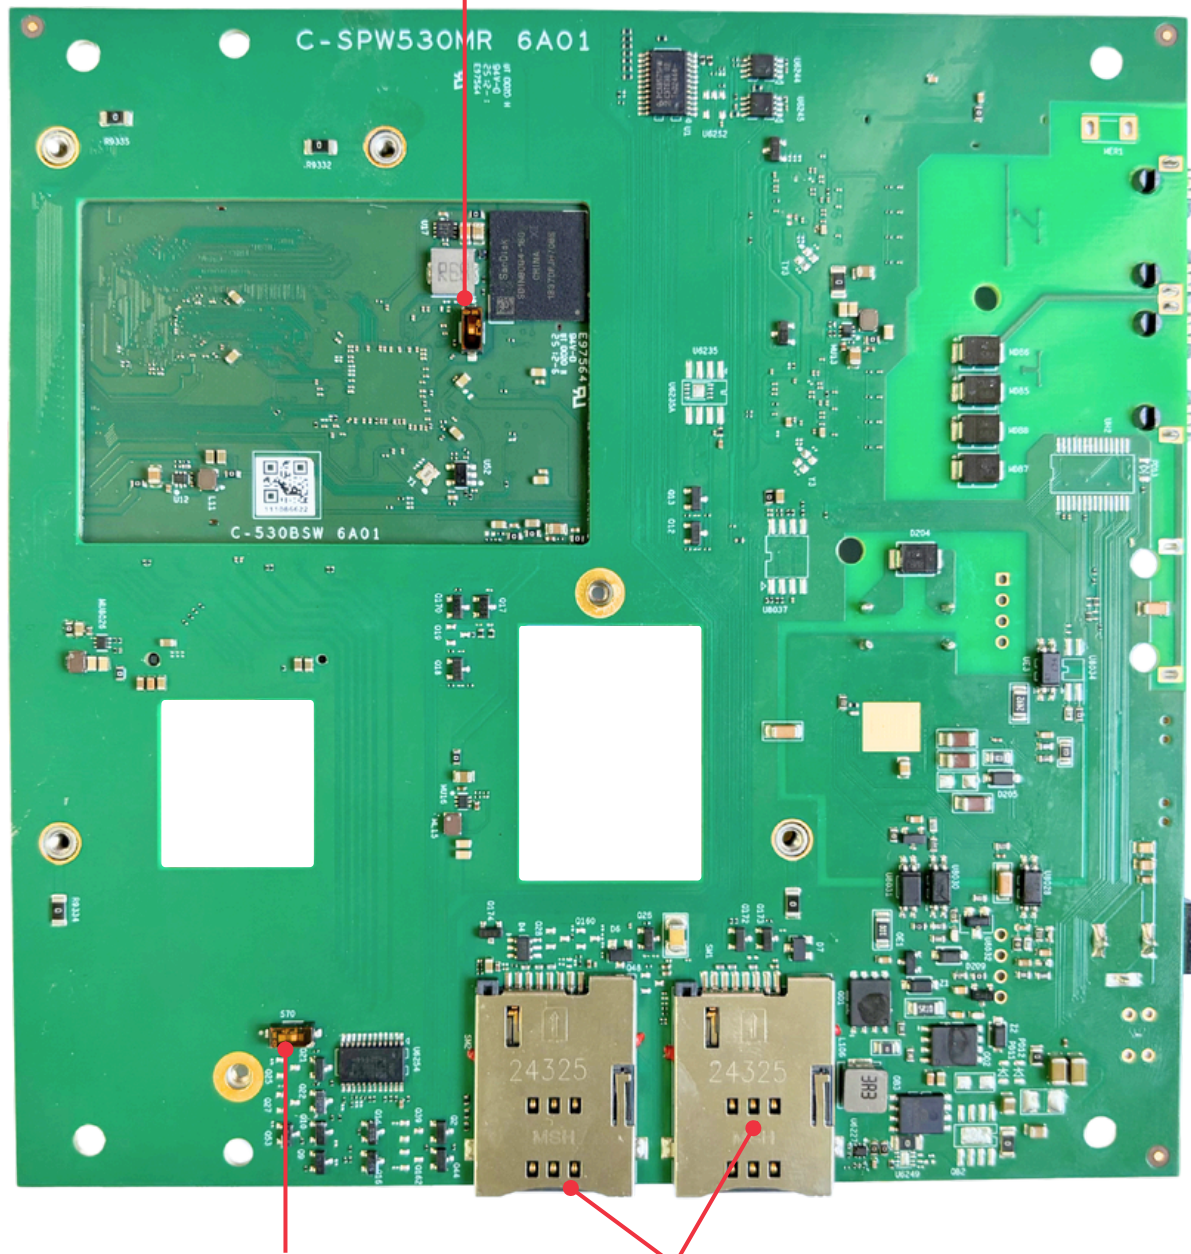

Switch for M.2 (NGFF) B Key Socket
(PCIe 3.0 and USB 3.0 Selectable)
ON: PCIe 3.0
OFF: USB 3.0

2x SIM Card Slot for
5G cellular module

Back View