


JustWiFi^{7™} - Cat8

Tri-Band WiFi 7 (802.11be) Embedded Board
Qualcomm's IPQ5322 SoC with QCN6274 Radio
2x2 MU-MIMO 2.4GHz, 5GHz, and 6GHz

Model: WPM530RJ

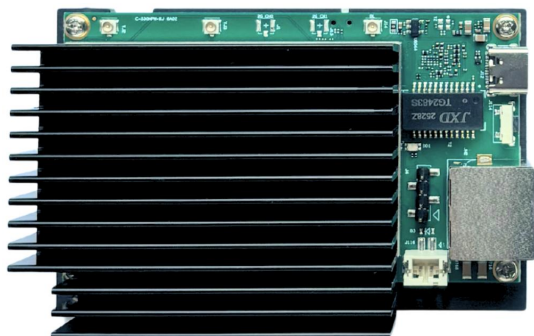

KEY FEATURES

- Qualcomm IPQ5322 Quad-Core Cortex-A53 @ 1.5GHz processor
- Qualcomm QCN6274 'Waikiki' series WiFi 7 (802.11a/b/g/n/ac/ax/be)
- 2.4GHz, 2x2 MU-MIMO, up to 688Mbps physical data rate
- 5GHz, 2x2 MU-MIMO, up to 4324Mbps physical data rate
- 6GHz, 2x2 MU-MIMO, up to 5765Mbps physical data rate
- Concurrent Tri-Band 2.4+5+6GHz WiFi 7
- 1x 10Gbps Ethernet port
- USB-C PD support. Can be powered from a 25W PD charger
- Easymesh implemented in FW
- Supports long-range wireless deployment with adjustable ACK timeout

APPLICATIONS

- 802.11be MU-MIMO OFDMA Access Point
- Internet of Things (IoT)
- Miniature size for easy mounting/integration in AI in-premise servers, security gateways, or application as standalone triband APs or mesh nodes.

Specifications

Chipset	Qualcomm IPQ5322 Quad-Core Cortex-A53 @ 1.5GHz processor 'Miami' Series QCN6274 'Waikiki' series for radio
Reference Design	Qualcomm AP.MI01.2+WK01.7
System Memory	512MB, DDR4 16-bit (1x16-bit) interface
Flash	NAND: 128MB NOR: 4MB
On board radio	3 radios (Tri-band concurrent radio)
Wireless	On-board 2x2 2.4GHz MU-MIMO OFDMA 802.11b/g/n/ax/be, max 22 dBm per chain On-board 2x2 5GHz MU-MIMO OFDMA 802.11a/n/ac/ax/be, max 17 dBm per chain On-board 2x2 6GHz MU-MIMO OFDMA 802.11ax/be, max 17 dBm per chain
Frequency Range	2.4GHz: 2.412~2.472GHz 5GHz: 5.180~5.825GHz 6GHz: 5.945~7.125GHz
Modulation Techniques	OFDMA: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM, 4096-QAM
Channel Spectrum Widths for WLAN	Supports 20/40MHz at 2.4GHz Supports 20/40/80/160/240MHz at 5GHz Supports 20/40/80/160/320MHz at 6GHz
Interfaces	1x USB Type-C port (power supply only) 1x 10 Gigabit Ethernet LAN/WAN port (RJ45) 1x Serial Interface 1x Reset Button 1x USB_Boot DIP Switch 2x U.FL Connectors 1x U.FL Connector for Bluetooth Antenna 1x 2-Pin Fan Connector
LED	1x LED (RGB) Indicator
Operating Voltage	9V or 12V (USB PD)
Power Consumption	18W (max)

Continued on Page 2 ...

Specifications

... Continued from Page 1

Certification	REACH & RoHS Compliance
Environmental Humidity, Non-Condensing	Operating: 5% to 95%, Storage: Max. 90%
Temperature Range	Operating: -20°C to 55°C, Storage: -40°C to 90°C
Supports Dynamic Frequency Selection (DFS)	YES
Dimensions (W x H x D) in mm	89 x 57 x 31.6 mm

*Configurations are subject to change without notifications.

RF Performance Table for 2.4GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
2.4GHz 802.11be EHT20	MCS 0	22dBm	25dBm	±2dB
	MCS 1	22dBm	25dBm	±2dB
	MCS 2	21dBm	24dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB
	MCS 4	19dBm	22dBm	±2dB
	MCS 5	19dBm	22dBm	±2dB
	MCS 6	18dBm	21dBm	±2dB
	MCS 7	18dBm	21dBm	±2dB
	MCS 8	17dBm	20dBm	±2dB
	MCS 9	17dBm	20dBm	±2dB
	MCS 10	16dBm	19dBm	±2dB
	MCS 11	16dBm	19dBm	±2dB
	MCS 12	15dBm	18dBm	±2dB
	MCS 13	15dBm	18dBm	±2dB
2.4GHz 802.11be EHT40	MCS 0	22dBm	25dBm	±2dB
	MCS 1	22dBm	25dBm	±2dB
	MCS 2	21dBm	24dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB
	MCS 4	19dBm	22dBm	±2dB
	MCS 5	19dBm	22dBm	±2dB
	MCS 6	18dBm	21dBm	±2dB
	MCS 7	18dBm	21dBm	±2dB
	MCS 8	17dBm	20dBm	±2dB
	MCS 9	17dBm	20dBm	±2dB
	MCS 10	16dBm	19dBm	±2dB
	MCS 11	16dBm	19dBm	±2dB
	MCS 12	15dBm	18dBm	±2dB
	MCS 13	15dBm	18dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
2.4GHz 802.11be EHT20	MCS 0	-94dBm	±2dB
	MCS 1	-91dBm	±2dB
	MCS 2	-88dBm	±2dB
	MCS 3	-86dBm	±2dB
	MCS 4	-83dBm	±2dB
	MCS 5	-79dBm	±2dB
	MCS 6	-77dBm	±2dB
	MCS 7	-75dBm	±2dB
	MCS 8	-72dBm	±2dB
	MCS 9	-70dBm	±2dB
	MCS 10	-67dBm	±2dB
	MCS 11	-65dBm	±2dB
	MCS 12	-	±2dB
	MCS 13	-	±2dB
2.4GHz 802.11be EHT40	MCS 0	-91dBm	±2dB
	MCS 1	-88dBm	±2dB
	MCS 2	-85dBm	±2dB
	MCS 3	-83dBm	±2dB
	MCS 4	-80dBm	±2dB
	MCS 5	-77dBm	±2dB
	MCS 6	-75dBm	±2dB
	MCS 7	-72dBm	±2dB
	MCS 8	-68dBm	±2dB
	MCS 9	-66dBm	±2dB
	MCS 10	-64dBm	±2dB
	MCS 11	-61dBm	±2dB
	MCS 12	-	±2dB
	MCS 13	-	±2dB

RF Performance Table for 5GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
5GHz 802.11be EHT20	MCS 0	17dBm	20dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	16dBm	19dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	14dBm	17dBm	±2dB
	MCS 9	13dBm	16dBm	±2dB
	MCS 10	12dBm	15dBm	±2dB
	MCS 11	12dBm	15dBm	±2dB
	MCS 12	11dBm	14dBm	±2dB
	MCS 13	11dBm	14dBm	±2dB
5GHz 802.11be EHT40	MCS 0	17dBm	20dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	16dBm	19dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	14dBm	17dBm	±2dB
	MCS 9	13dBm	16dBm	±2dB
	MCS 10	12dBm	15dBm	±2dB
	MCS 11	12dBm	15dBm	±2dB
	MCS 12	11dBm	14dBm	±2dB
	MCS 13	11dBm	14dBm	±2dB
5GHz 802.11be EHT80	MCS 0	16dBm	19dBm	±2dB
	MCS 1	16dBm	19dBm	±2dB
	MCS 2	16dBm	19dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	15dBm	18dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	13dBm	16dBm	±2dB
	MCS 9	12dBm	15dBm	±2dB
	MCS 10	11dBm	14dBm	±2dB
	MCS 11	11dBm	14dBm	±2dB
	MCS 12	10dBm	13dBm	±2dB
	MCS 13	10dBm	13dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11be EHT20	MCS 0	-92dBm	±2dB
	MCS 1	-89dBm	±2dB
	MCS 2	-86dBm	±2dB
	MCS 3	-83dBm	±2dB
	MCS 4	-80dBm	±2dB
	MCS 5	-75dBm	±2dB
	MCS 6	-74dBm	±2dB
	MCS 7	-73dBm	±2dB
	MCS 8	-69dBm	±2dB
	MCS 9	-67dBm	±2dB
	MCS 10	-64dBm	±2dB
	MCS 11	-62dBm	±2dB
	MCS 12	-57dBm	±2dB
	MCS 13	-56dBm	±2dB
5GHz 802.11be EHT40	MCS 0	-89dBm	±2dB
	MCS 1	-86dBm	±2dB
	MCS 2	-84dBm	±2dB
	MCS 3	-81dBm	±2dB
	MCS 4	-77dBm	±2dB
	MCS 5	-73dBm	±2dB
	MCS 6	-71dBm	±2dB
	MCS 7	-70dBm	±2dB
	MCS 8	-66dBm	±2dB
	MCS 9	-64dBm	±2dB
	MCS 10	-61dBm	±2dB
	MCS 11	-59dBm	±2dB
	MCS 12	-56dBm	±2dB
	MCS 13	-54dBm	±2dB
5GHz 802.11be EHT80	MCS 0	-86dBm	±2dB
	MCS 1	-82dBm	±2dB
	MCS 2	-80dBm	±2dB
	MCS 3	-77dBm	±2dB
	MCS 4	-74dBm	±2dB
	MCS 5	-70dBm	±2dB
	MCS 6	-68dBm	±2dB
	MCS 7	-67dBm	±2dB
	MCS 8	-64dBm	±2dB
	MCS 9	-62dBm	±2dB
	MCS 10	-59dBm	±2dB
	MCS 11	-58dBm	±2dB
	MCS 12	-55dBm	±2dB
	MCS 13	-53dBm	±2dB

RF Performance Table for 5GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
5GHz 802.11be EHT160	MCS 0	16dBm	19dBm	±2dB
	MCS 1	16dBm	19dBm	±2dB
	MCS 2	16dBm	19dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	15dBm	18dBm	±2dB
	MCS 5	14dBm	17dBm	±2dB
	MCS 6	13dBm	16dBm	±2dB
	MCS 7	12dBm	15dBm	±2dB
	MCS 8	11dBm	14dBm	±2dB
	MCS 9	10dBm	13dBm	±2dB
	MCS 10	9dBm	12dBm	±2dB
	MCS 11	9dBm	12dBm	±2dB
	MCS 12	8dBm	11dBm	±2dB
	MCS 13	8dBm	11dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
5GHz 802.11be EHT160	MCS 0	-84dBm	±2dB
	MCS 1	-80dBm	±2dB
	MCS 2	-78dBm	±2dB
	MCS 3	-75dBm	±2dB
	MCS 4	-72dBm	±2dB
	MCS 5	-67dBm	±2dB
	MCS 6	-66dBm	±2dB
	MCS 7	-65dBm	±2dB
	MCS 8	-61dBm	±2dB
	MCS 9	-60dBm	±2dB
	MCS 10	-56dBm	±2dB
	MCS 11	-53dBm	±2dB
	MCS 12	-52dBm	±2dB
	MCS 13	-51dBm	±2dB

COMPEX SYSTEMS
PRELIMINARY

RF Performance Table for 6GHz

	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
6GHz 802.11be EHT20	MCS 0	17dBm	20dBm	±2dB
	MCS 1	17dBm	20dBm	±2dB
	MCS 2	17dBm	20dBm	±2dB
	MCS 3	17dBm	20dBm	±2dB
	MCS 4	16dBm	19dBm	±2dB
	MCS 5	16dBm	19dBm	±2dB
	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	13dBm	16dBm	±2dB
	MCS 9	12dBm	15dBm	±2dB
	MCS 10	11dBm	14dBm	±2dB
	MCS 11	11dBm	14dBm	±2dB
	MCS 12	10dBm	13dBm	±2dB
	MCS 13	10dBm	13dBm	±2dB
6GHz 802.11be EHT40	MCS 0	16dBm	19dBm	±2dB
	MCS 1	16dBm	19dBm	±2dB
	MCS 2	16dBm	19dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	16dBm	19dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	13dBm	16dBm	±2dB
	MCS 9	12dBm	15dBm	±2dB
	MCS 10	11dBm	14dBm	±2dB
	MCS 11	11dBm	14dBm	±2dB
	MCS 12	10dBm	13dBm	±2dB
	MCS 13	10dBm	13dBm	±2dB
6GHz 802.11be EHT80	MCS 0	16dBm	19dBm	±2dB
	MCS 1	16dBm	19dBm	±2dB
	MCS 2	16dBm	19dBm	±2dB
	MCS 3	16dBm	19dBm	±2dB
	MCS 4	16dBm	19dBm	±2dB
	MCS 5	15dBm	18dBm	±2dB
	MCS 6	15dBm	18dBm	±2dB
	MCS 7	14dBm	17dBm	±2dB
	MCS 8	13dBm	16dBm	±2dB
	MCS 9	12dBm	15dBm	±2dB
	MCS 10	11dBm	14dBm	±2dB
	MCS 11	11dBm	14dBm	±2dB
	MCS 12	10dBm	13dBm	±2dB
	MCS 13	10dBm	13dBm	±2dB


	Data Rate	RX Specifications Sensitivity	Tolerance
6GHz 802.11be EHT20	MCS 0	-90dBm	±2dB
	MCS 1	-88dBm	±2dB
	MCS 2	-85dBm	±2dB
	MCS 3	-83dBm	±2dB
	MCS 4	-79dBm	±2dB
	MCS 5	-75dBm	±2dB
	MCS 6	-74dBm	±2dB
	MCS 7	-72dBm	±2dB
	MCS 8	-69dBm	±2dB
	MCS 9	-67dBm	±2dB
	MCS 10	-63dBm	±2dB
	MCS 11	-62dBm	±2dB
	MCS 12	-58dBm	±2dB
	MCS 13	-56dBm	±2dB
6GHz 802.11be EHT40	MCS 0	-87dBm	±2dB
	MCS 1	-86dBm	±2dB
	MCS 2	-83dBm	±2dB
	MCS 3	-80dBm	±2dB
	MCS 4	-77dBm	±2dB
	MCS 5	-72dBm	±2dB
	MCS 6	-71dBm	±2dB
	MCS 7	-70dBm	±2dB
	MCS 8	-66dBm	±2dB
	MCS 9	-64dBm	±2dB
	MCS 10	-61dBm	±2dB
	MCS 11	-59dBm	±2dB
	MCS 12	-55dBm	±2dB
	MCS 13	-54dBm	±2dB
6GHz 802.11be EHT80	MCS 0	-85dBm	±2dB
	MCS 1	-83dBm	±2dB
	MCS 2	-81dBm	±2dB
	MCS 3	-78dBm	±2dB
	MCS 4	-75dBm	±2dB
	MCS 5	-70dBm	±2dB
	MCS 6	-69dBm	±2dB
	MCS 7	-67dBm	±2dB
	MCS 8	-64dBm	±2dB
	MCS 9	-62dBm	±2dB
	MCS 10	-58dBm	±2dB
	MCS 11	-56dBm	±2dB
	MCS 12	-54dBm	±2dB
	MCS 13	-52dBm	±2dB

RF Performance Table for 6GHz


	Data Rate	TX Power (per chain)	TX Power (2 chains)	Tolerance
6GHz 802.11be EHT160	MCS 0	15dBm	18dBm	±2dB
	MCS 1	15dBm	18dBm	±2dB
	MCS 2	15dBm	18dBm	±2dB
	MCS 3	15dBm	18dBm	±2dB
	MCS 4	14dBm	17dBm	±2dB
	MCS 5	13dBm	16dBm	±2dB
	MCS 6	13dBm	16dBm	±2dB
	MCS 7	13dBm	16dBm	±2dB
	MCS 8	12dBm	15dBm	±2dB
	MCS 9	11dBm	14dBm	±2dB
	MCS 10	10dBm	13dBm	±2dB
	MCS 11	10dBm	13dBm	±2dB
	MCS 12	9dBm	12dBm	±2dB
	MCS 13	9dBm	12dBm	±2dB
6GHz 802.11be EHT320	MCS 0	15dBm	18dBm	±2dB
	MCS 1	15dBm	18dBm	±2dB
	MCS 2	15dBm	18dBm	±2dB
	MCS 3	15dBm	18dBm	±2dB
	MCS 4	14dBm	17dBm	±2dB
	MCS 5	13dBm	16dBm	±2dB
	MCS 6	12dBm	15dBm	±2dB
	MCS 7	11dBm	14dBm	±2dB
	MCS 8	10dBm	13dBm	±2dB
	MCS 9	10dBm	13dBm	±2dB
	MCS 10	9dBm	12dBm	±2dB
	MCS 11	9dBm	12dBm	±2dB
	MCS 12	8dBm	11dBm	±2dB
	MCS 13	8dBm	11dBm	±2dB

	Data Rate	RX Specifications Sensitivity	Tolerance
6GHz 802.11be EHT160	MCS 0	-82dBm	±2dB
	MCS 1	-80dBm	±2dB
	MCS 2	-78dBm	±2dB
	MCS 3	-75dBm	±2dB
	MCS 4	-72dBm	±2dB
	MCS 5	-67dBm	±2dB
	MCS 6	-66dBm	±2dB
	MCS 7	-65dBm	±2dB
	MCS 8	-62dBm	±2dB
	MCS 9	-59dBm	±2dB
	MCS 10	-55dBm	±2dB
	MCS 11	-53dBm	±2dB
	MCS 12	-51dBm	±2dB
	MCS 13	-50dBm	±2dB
6GHz 802.11be EHT320	MCS 0	-81dBm	±2dB
	MCS 1	-78dBm	±2dB
	MCS 2	-76dBm	±2dB
	MCS 3	-72dBm	±2dB
	MCS 4	-69dBm	±2dB
	MCS 5	-65dBm	±2dB
	MCS 6	-64dBm	±2dB
	MCS 7	-63dBm	±2dB
	MCS 8	-60dBm	±2dB
	MCS 9	-55dBm	±2dB
	MCS 10	-52dBm	±2dB
	MCS 11	-50dBm	±2dB
	MCS 12	-49dBm	±2dB
	MCS 13	-48dBm	±2dB

Component Map

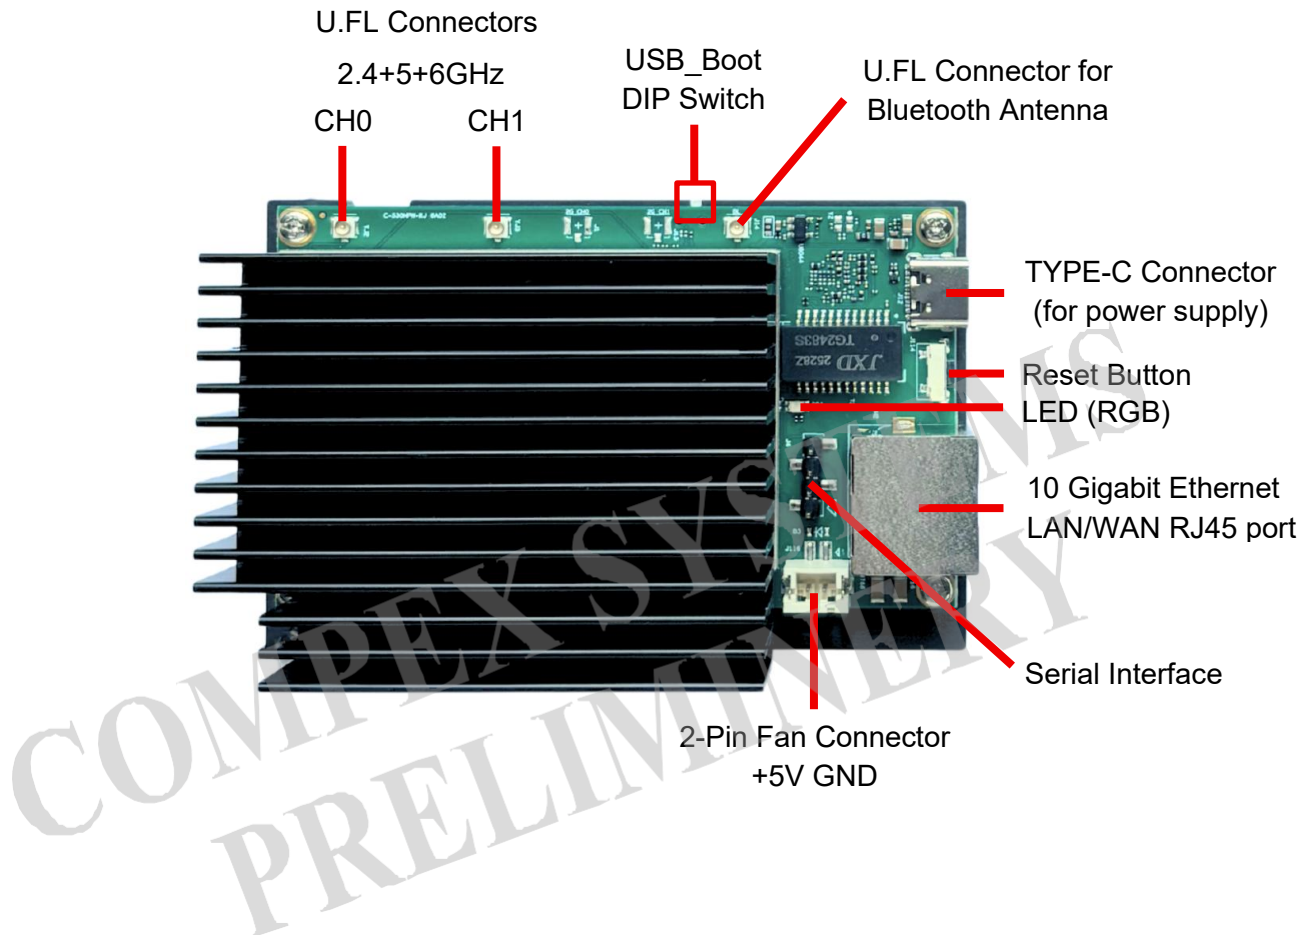


Mechanical Dimension

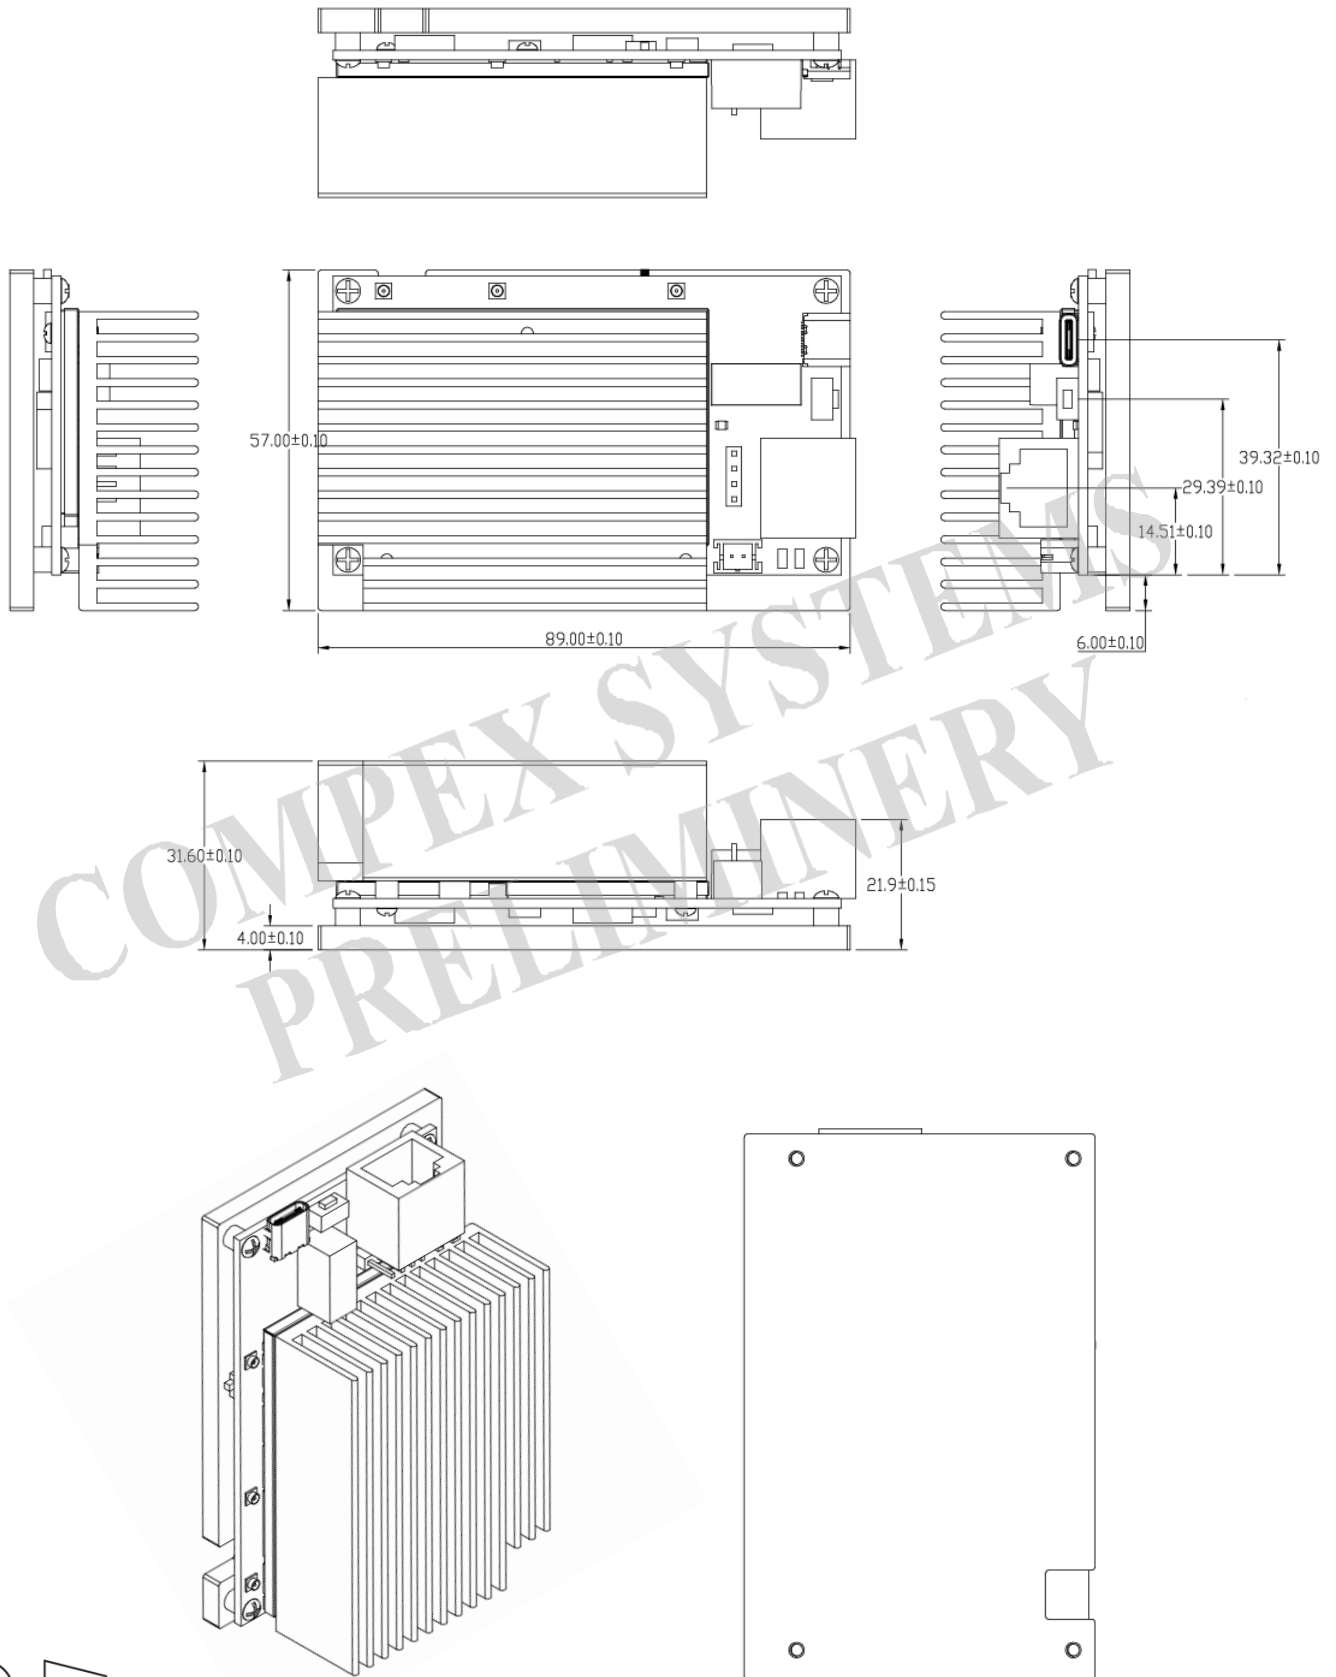

All dimensions are in mm.

Block Diagram

The following figure provides a basic overview of the JustWiFi⁷™ Cat-8 module.

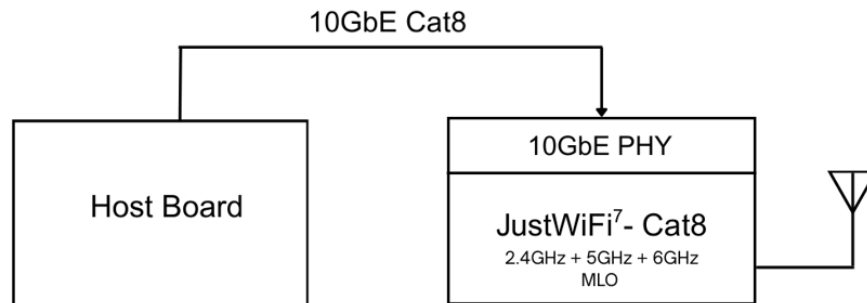

Firmware / Software

Firmware

OpenWRT 24.10

Development Kits

SDK

SDKs with QCA binary drivers are available for software developers.

Accessory

Serial Converter, Power Supply Only if available

Ordering Options

Item Code	Processor	Model	Description
WPM530-RJ 6A02PR4512BR-TE	IPQ5322	WPM530RJ	IPQ5322 + QCN6274 Supports 2x2 MU-MIMO 802.11a/b/g/n/ac/ax/be Concurrent 2.4GHz + 5GHz + 6GHz tri-band radio